

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 August 2005 (18.08.2005)

PCT

(10) International Publication Number
WO 2005/075092 A1

(51) International Patent Classification⁷: **B05B 5/16, 5/053**

Edward [US/US]; 16, Brian Daniel Court, Resiterstown, Maryland 21136 (US).

(21) International Application Number:
PCT/JP2004/001359

(74) Agents: **NISHIKAWA, Yoshikiyo et al.**; c/o Hokuto Patent Attorneys Office, Umeda-daiichiseimei Bldg., 5th Floor 12-17, Umeda 1-chome, Kita-ku, Osaka-shi, Osaka 5300001 (JP).

(22) International Filing Date: 9 February 2004 (09.02.2004)

(25) Filing Language: English

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(26) Publication Language: English

(71) Applicants (*for all designated States except US*): **MAT-SUSHITA ELECTRIC WORKS, LTD.** [JP/JP]; 1048, Oaza-kadoma, Kadoma-shi, Osaka 5718686 (JP). **THE PROCTER & GAMBLE COMPANY** [US/US]; One Procter & Gamble Plaza, Cincinnati, Ohio 45202 (US).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **YAMAGUCHI, Naoki** [JP/JP]; c/o Matsushita Electric Works, Ltd., 1048, Oaza-kadoma, Kadoma-shi, Osaka 5718686 (JP). **NAGASAWA, Shunichi** [JP/JP]; 4-1-24-1414, Hamakoushien, Nishinomiya-shi, Hyogo 6638154 (JP). **WILSON, David,**

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,

[Continued on next page]

(54) Title: ELECTROSTATIC SPRAYING DEVICE

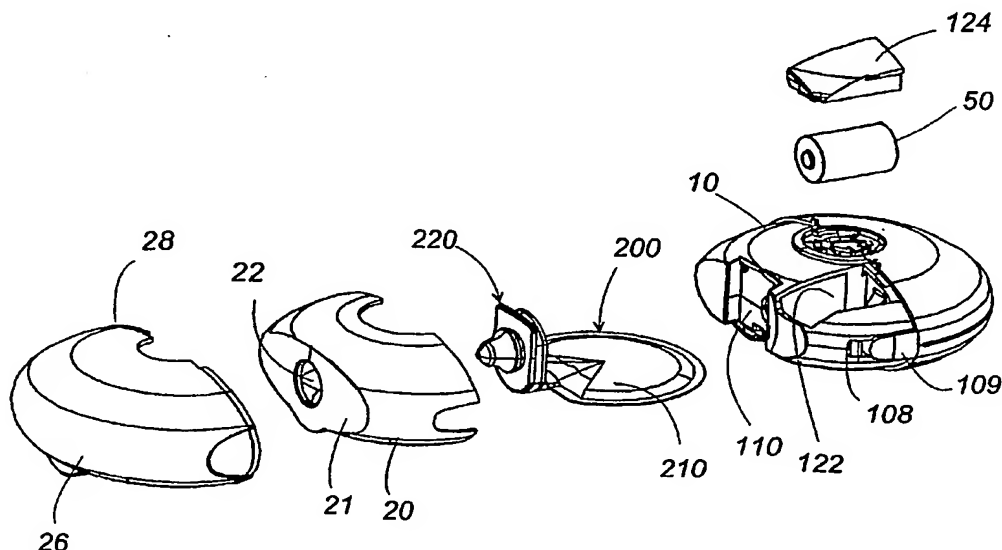

(57) Abstract: An electrostatic spraying device has a removable cartridge with a reservoir containing a volume of liquid compositions to be electrically sprayed. The device includes a nozzle for dispensing the liquid and an emitter electrode disposed adjacent to the nozzle for charging the liquid composition just being dispensed from the nozzle. A field electrode surrounds the reservoir in order to charge the liquid composition within the reservoir, thereby avoiding an occurrence of electric current which would deteriorate the composition remaining in the reservoir. The reservoir is at least partially made of deformable material such that the reservoir is capable of receiving pressure to deform and thus supply the liquid composition out of the reservoir. Thus, the reservoir can be designed into a simple and compact structure, thereby providing an increased liquid containing volume in relation to the bulk of the removable cartridge.



GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*